


4. Manșete MA 25 - poliuretan

5. Manșete K 03 - cauciuc

Etanșări de translație



4. MA 25 -

Material standard: Poliuretan
AU92
Presiunea de lucru: 300 bar


Viteza de lucru: < 0,5 m/s

Temperatura de lucru: -40 la +100

**UTILIZARI:
ETANSARE
TIJA
PISTON**

Dint [mm]	Dext [mm]	Gros [mm]
40	56	10
40	60	10
40	65	12
42	50	8
42	52	6
45	55	10
45	60	10
45	65	10
48	58	10
50	60	10
50	63	6
50	65	10
50	70	12
50	70	18
50	75	12
50	65	10
55	70	12
55	80	12
55	65	10
55	70	12
60	70	10
60	75	12
60	80	10
60	80	12
65	75	10
65	80	12
65	90	12
70	80	12
70	85	12
70	90	12
70	90	18
75	95	12
80	90	12
80	100	10

Dint [mm]	Dext [mm]	Gros [mm]
80	100	12
85	95	12
85	100	12
85	105	12
90	100	12
90	105	12
90	110	12
95	105	12
95	110	12
95	115	12
100	115	12
100	120	12
105	125	15
110	125	15
110	130	15
115	135	15
120	140	15
125	140	15
125	145	15
130	150	15
135	155	15
140	160	15
145	165	15
150	170	15
160	180	15



5. K 03

Utilizare :	Etansare piston
Material:	Cauciuc/Cauciuc pinzat/POM
Presiunea de lucru:	300 bar
Temperatura de lucru:	-30 la +100
Viteza de lucru:	0,5 m/s

D ext [mm]	D int [mm]	H [mm]	Ghidare [mm]
40	24	18.4	6.35
40	26	15.5	2.6
40	30	16.4	6.35
45	31	15.5	2.6
50	34	18.4	6.35
50	34	20.5	3.1
55	39	18.4	6.35
55	39	20.5	3.1
60	44	18.4	6.35
60	44	20.5	3.1
63	47	18.4	6.35
63	47	19.4	6.35
63	47	20.5	3.1
65	49	20.5	3.1
65	50	18.4	6.35
70	50	22.4	6.35
70	54	20.5	3.1
75	55	22.4	6.35
80	60	22.4	6.35
80	62	22.5	3.6
85	65	22.4	6.35
90	70	22.4	6.35
90	72	22.5	3.6
100	75	22.4	6.35
100	82	22.5	3.6

Etanșări de translație


6. Etanșare piston K 30

7. Etanșare piston S 01

8. Etanșare piston S 31

Etanșări de translație


6. K 30

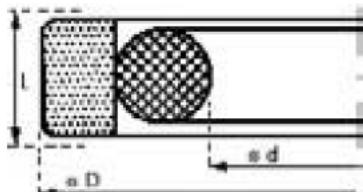


D ext. [mm]	D int. [mm]	H [mm]
20	12.5	3.2
20	15.1	2.2
22	14.5	3.2
24	16.5	3.2
25	17.5	3.2
25	20.1	2.2
27	19.5	3.2
28	17	4.2
28	20.5	3.2
30	22.5	3.2
32	24.5	3.2
35	27.5	3.2
36	28.5	3.2
38	30.5	3.2
39	31.5	3.2
40	29	4.2
40	32.5	3.2
42	31	4.2
45	34	4.2
48	37	4.2
50	39	4.2
52	41	4.2
54	43	4.2
55	44	4.2
60	49	4.2
63	52	4.2
65	54	4.2
70	54.5	6.3
70	59	4.2
75	64	4.2
80	59	8.1
80	64.5	6.3
82	71	4.2
85	64	8.1
85	69.5	6.3
90	69	8.1
90	74.5	6.3
95	74	8.1
95	79.5	6.3
95	84	4.2
100	79	8.1
100	84.5	6.3
110	94.5	6.3
120	104.5	6.3

Utilizare :	Etansare piston
Material:	Compozit PTFE cu Bronz/NBR70
Presiunea de lucru:	400 bar
Temperatura de lucru:	-30 la +120
Viteza de lucru:	15 m/s

8. S 31



7. S 01



D int. [mm]	D Ext. [mm]	H [mm]
20	30	18.5
25	37	22.5
35	50	22.5
40	52	22.5
40	55	22.5
45	60	22.5
50	70	30
56	71	22.5
60	75	22.5
70	85	22.5
70	90	40
80	95	22.5
90	105	22.5
90	110	40
100	115	30


D int. [mm]	D ext. [mm]	Inaltimea [mm]
10	14.9	2.2
10	17.3	3.2
12	16.9	2.2
12	19.3	3.2
14	18.9	2.2
14	21.3	3.2
15	22.3	3.2
16	20.9	2.2
16	23.3	3.2
18	22.9	2.2
18	25.3	3.2
20	27.3	3.2
20	30.7	4.2
22	29.3	3.2
22	32.7	4.2
25	32.3	3.2
25	35.7	4.2
28	35.3	3.2
28	38.7	4.2
30	37.3	3.2
30	40.7	4.2
32	39.3	3.2
32	42.7	4.2
35	42.3	3.2
35	45.7	4.2
36	43.3	3.2
36	46.7	4.2
38	48.7	4.2
40	50.7	4.2
40	55.1	6.3
42	52.7	4.2
45	55.7	4.2
45	60.1	6.3
50	60.7	4.2
50	65.1	6.3
55	65.7	4.2
55	70.1	6.3
56	66.7	4.2
56	71.1	6.3
58	73.1	6.3
60	70.7	4.2
60	75.1	6.3
63	78.1	6.3
65	80.1	6.3
70	85.1	6.3
75	90.1	6.3
80	95.1	6.3
85	100.1	6.3
90	100.7	4.2
90	105.1	6.3
95	110.1	6.3
100	115.1	6.3

Racloare
9. Raclor tip A 40
10. Raclor tip A 41
11. Raclor tip AM 43
12. Raclor tip AD 51

Racloare


Utilizare :	Raclare tija
Material:	NBR 90
Temperatura de lucru:	-40 la +100
Viteza de lucru:	4 m/s

10. A 41




D int. [mm]	D ext. [mm]	H [mm]
8	16	4/7
10	18	4/7
12	20	4/7
14	22	4/7
15	23	4/7
16	24	4/7
18	26	4/7
20	28	4/7
22	30	4/7
25	33	4/7
28	36	4/7
30	38	4/7
32	40	4/7
35	43	4/7
36	44	4/7
40	48	4/7
42	50	4/7
44	52	4/7
45	53	4/7
50	58	4/7
50	58	4/7
55	63	4/7
56	64	4/7
60	68	4/7
62	70	4/7
63	71	4/7
65	73	4/7
70	78	4/7
75	83	4/7
80	88	4/7
85	93	4/7
90	98	4/7
95	103	4/7
100	108	4/7

9. A 40




D int. [mm]	D ext. [mm]	H [mm]
20	28	5/7
22	30	5/7
25	33	5/7
28	36	5/7
30	38	5/7
32	40	5/7
35	43	5/7
36	44	5/7
40	48	5/7
42	50	5/7
45	55	5/7
50	58	5/7
50	60	5/7
55	65	5/7
56	66	5/7
60	68	5/7
60	70	5/7
63	73	5/7
65	75	5/7
70	78	5/7
70	80	5/7
75	87	7/12
85	97	7/12
90	102	7/12
100	112	7/12

11. AM 43



D int. [mm]	D ext. [mm]	H [mm]
10	16	3/4,5
10	20	5/8
12	20	4/6
12	22	5/8
14	22	3/4
15	25	5/8
16	22	3/4
16	26	5/8
18	28	7/10
20	28	3,5/5
20	30	5/8
20	30	7/10
22	28	5/9
22	32	5/8
22	32	7/10
22	35	5/8
25	35	5/8
25	35	7/10
26	35	7/10
28	38	7/10
28	40	7/10
30	40	5/8
30	40	7/10
32	45	7/10
35	45	7/10
35	47	7/10
36	45	7/10
40	50	5/8
40	50	7/10
40	52	7/10
42	52	7/10
45	55	7/10
45	60	7/10
50	56	5/8
50	60	5/8
50	60	7/10
50	65	5/8
50	65	7/10
55	65	5/8
55	65	7/10
56	66	7/10
60	70	7/10
60	75	7/10
63	75	7/10
65	75	7/10
70	80	7/10
75	85	7/10
80	90	7/10
85	95	7/10
90	100	7/10
95	105	7/10
100	110	7/10
130	145	9/12
160	175	9/12

12. AD 51



d [mm]	D [mm]	H [mm]
10	18	6
12	20	6
14	22	6
15	23	6
16	24	6
18	26	6
20	28	6
22	30	6
24	32	6
25	33	6
30	38	6
32	40	6
35	43	6
36	44	6
37	45	6
38	46	6
40	48	6
42	50	6
45	53	6
46	54	6
48	56	6
50	58	6
52	60	6
55	63	6
56	64	6
60	68	6
63	71	6
65	73	6
68	76	6
70	78	6
75	83	6
80	88	6
85	93	6
90	98	6
95	103	6
100	108	6
105	117	8,2
110	122	8,2